

Technical Specifications

Power supply	9 ... 28VDC
Power consumption	typ. 0.05W, max. 0.8W (while reading NFC)
Power loss	max. 0.8W
Interfaces	Loxone Tree: connection with Miniserver / Tree Extension
Ambient temperature	-20 ... 70°C / -4 ... 158°F
Humidity	max. 95% r.H. (non condensing)
Touch points	capacitive touch detection
Click feedback	Yes
Access possibilities	NFC, Key code
NFC	Frequency: 13.56MHz
Safety rating	IP44
Maintenance & Cleaning	This device is free of maintenance and may only be cleaned with a dry cloth.

Compatible NFC media

Unencrypted	ISO/IEC 14443, fixed UID required
Encrypted	Media with MIFARE® DESFire® EV1 Chip



For more information
about this product, visit
loxone.com/nfc-code-touch-tree-2

**Loxone
Electronics GmbH**
Smart Home 1
4154 Kollerschlag
Austria

Loxone UK
The Forum
Station Road
Theale, RG7 4RA
United Kingdom



For additional information,
declaration of conformity, visit
www.loxone.com/datasheets

V130323

Need Help?
loxone.com/support



NFC Code Touch Tree

Part No.: 100481 (White)
Part No.: 100480 (Anthracite)

About the product

Get access with encrypted or unencrypted NFC tags, via your NFC enabled smartphone or through your own unique key code.

Features

- Authentication via encrypted and unencrypted NFC Tags or NFC enabled smartphones or key code
- Supports permanent, disposable or time-limited key codes
- Universal button
- Alarm-authentication

Important Information



For security reasons, we strongly suggest you only use encrypted NFC tags for access control from Loxone.

Installation

Install the mounting frame of the NFC Code Touch on the desired installation place. Power up the device and pair it with your Miniserver in Loxone Config. To finish the installation, attach the NFC Code Touch as shown on the mounting frame.

Connection

Wire cross-section	0.25 ... 0.8mm ² / AWG23 ... 18
Stripping length	5mm / 0.2"
Temperature resistance	-40 ... 105°C / -40 ... 221°F

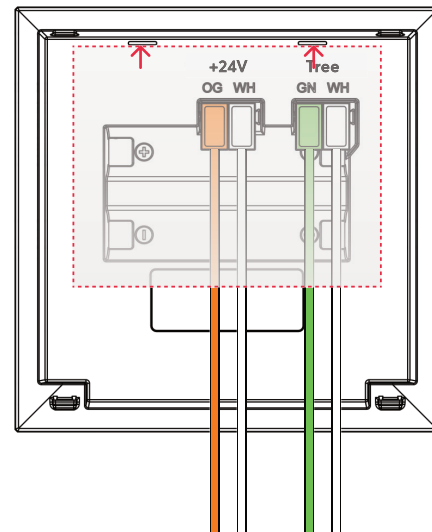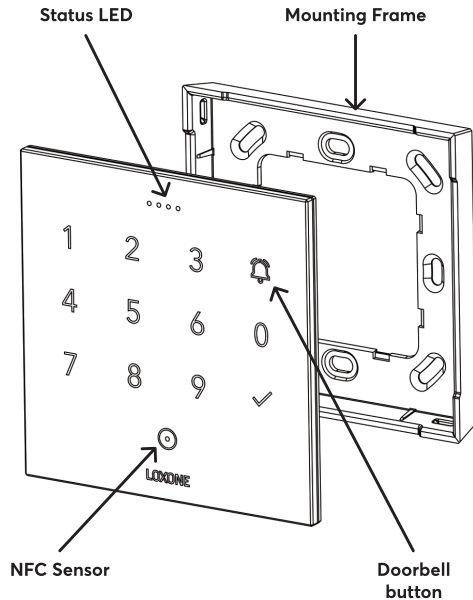

For protection against water, the enclosed adhesive cover must be attached!